


APPENDIX E

2025 Build Freeway Analysis

BASIC FREEWAY SEGMENTS WORKSHEET

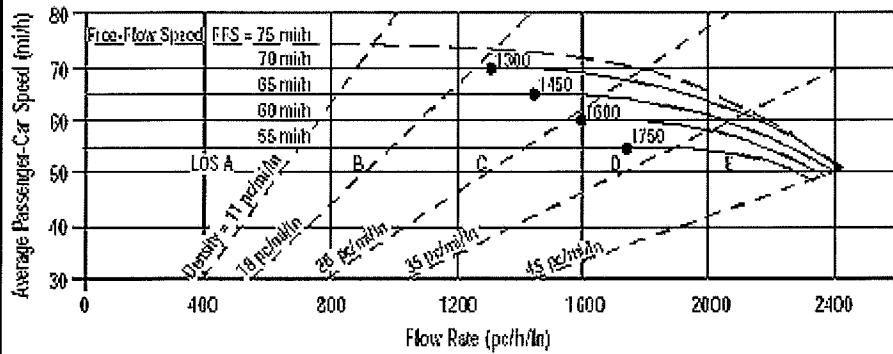

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 NB
Agency or Company	McMahon	From/To	Between C-D Ramps
Date Performed	11/27/07	Jurisdiction	
Analysis Time Period	AM	Analysis Year	2025 Build

Project Description Route 128 Add-A-Lane

Oper.(LOS)
 Des.(N)
 Planning Data

Flow Inputs			
Volume, V	7700 veh/h	Peak-Hour Factor, PHF	0.90
AA DT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AADT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AADT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	


Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 I/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	2160 pc/h/ln	Design LOS	
S	52.0 mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	41.5 pc/mi/ln	S	mi/h
LOS	E	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

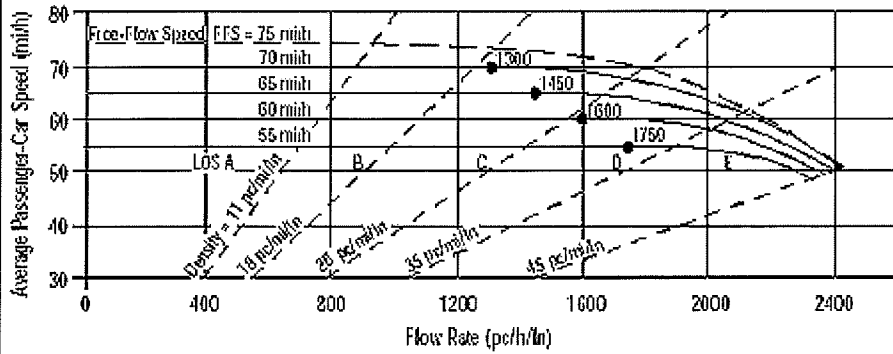

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 SB
Agency or Company	McMahon	From/To	Between C-D Ramps
Date Performed	11/27/07	Jurisdiction	
Analysis Time Period	AM	Analysis Year	2025 Build
Project Description Route 128 Add-A-Lane			

<input checked="" type="checkbox"/> Oper.(LOS)	<input type="checkbox"/> Des.(N)	<input type="checkbox"/> Planning Data
--	----------------------------------	--

Flow Inputs			
Volume, V	5900 veh/h	Peak-Hour Factor, PHF	0.90
AAAT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AAAT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AAAT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	


Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 I/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	1655 pc/h/ln	Design LOS	
S	55.0 mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	30.1 pc/mi/ln	S	mi/h
LOS	D	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

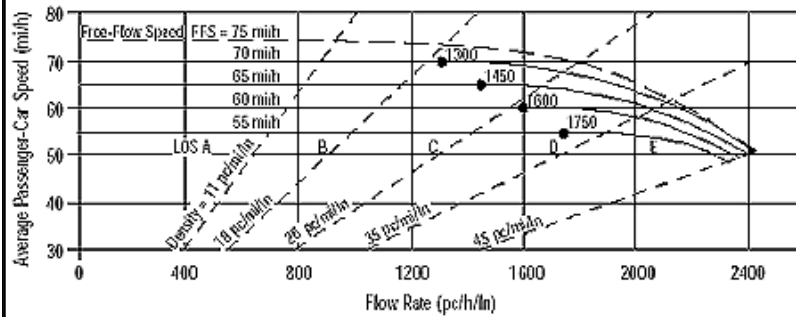

Application	Input	Output
Operational (LOS)	FFS, N, v _p	LOS, S, D
Design (N)	FFS, LOS, v _p	N, S, D
Design (v _p)	FFS, LOS, N	v _p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v _p)	FFS, LOS, N	v _p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 NB
Agency or Company	McMahon	From/To	Highland Ave to Rt 9
Date Performed	11/15/07	Jurisdiction	
Analysis Time Period	AM	Analysis Year	2025 Build

Project Description Route 128 Add-A-Lane

Oper.(LOS) Des.(N) Planning Data

Flow Inputs			
Volume, V	8700	veh/h	Peak-Hour Factor, PHF 0.90
AADT		veh/day	%Trucks and Buses, P _T 2
Peak-Hr Prop. of AADT, K			%RVs, P _R 0
Peak-Hr Direction Prop, D			General Terrain: Level
DDHV = AADT x K x D		veh/h	Grade % Length mi
Driver type adjustment	1.00		Up/Down %


Calculate Flow Adjustments			
f _p	1.00	E _R	1.2
E _T	1.5	f _{HV} = 1/[1+P _T (E _T - 1) + P _R (E _R - 1)]	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f _{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f _{LC}	mi/h
Interchange Density	0.50 l/mi	f _{ID}	mi/h
Number of Lanes, N	5	f _N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
<u>Operational (LOS)</u>		<u>Design (N)</u>	
v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	1953 pc/h/ln	Design LOS	
S	54.5 mi/h	v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	pc/h
D = v _p / S	35.8 pc/mi/ln	S	mi/h
LOS	E	D = v _p / S	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E _R - Exhibits 23-8, 23-10	f _{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E _T - Exhibits 23-8, 23-10, 23-11	f _{LC} - Exhibit 23-5
v _p - Flow rate	FFS - Free-flow speed	f _p - Page 23-12	f _N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v _p - Exhibits 23-2, 23-3	f _{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

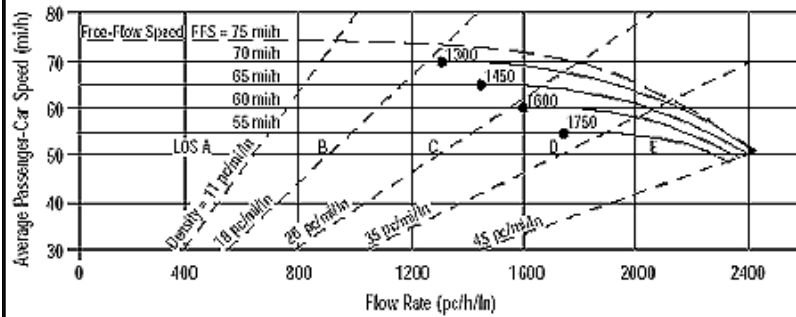

Application	Input	Output
Operational (LOS)	FFS, N, v _p	LOS, S, D
Design (N)	FFS, LOS, v _p	N, S, D
Design (v _p)	FFS, LOS, N	v _p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v _p)	FFS, LOS, N	v _p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 SB
Agency or Company	McMahon	From/To	Highland Ave to Rt 9
Date Performed	8/9/07	Jurisdiction	
Analysis Time Period	AM	Analysis Year	2025 Build

Project Description Route 128 Add-A-Lane

Oper.(LOS) Des.(N) Planning Data

Flow Inputs			
Volume, V	8200	veh/h	Peak-Hour Factor, PHF 0.90
AADT		veh/day	%Trucks and Buses, P _T 2
Peak-Hr Prop. of AADT, K			%RVs, P _R 0
Peak-Hr Direction Prop, D			General Terrain: Level
DDHV = AADT x K x D		veh/h	Grade % Length mi
Driver type adjustment	1.00		Up/Down %


Calculate Flow Adjustments			
f _p	1.00	E _R	1.2
E _T	1.5	f _{HV} = 1/[1+P _T (E _T - 1) + P _R (E _R - 1)]	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f _{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f _{LC}	mi/h
Interchange Density	0.50 l/mi	f _{ID}	mi/h
Number of Lanes, N	5	f _N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
<u>Operational (LOS)</u>		<u>Design (N)</u>	
v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	1840 pc/h/ln	Design LOS	
S	54.9 mi/h	v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	pc/h
D = v _p / S	33.5 pc/mi/ln	S	mi/h
LOS	D	D = v _p / S	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E _R - Exhibits 23-8, 23-10	f _{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E _T - Exhibits 23-8, 23-10, 23-11	f _{LC} - Exhibit 23-5
v _p - Flow rate	FFS - Free-flow speed	f _p - Page 23-12	f _N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v _p - Exhibits 23-2, 23-3	f _{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

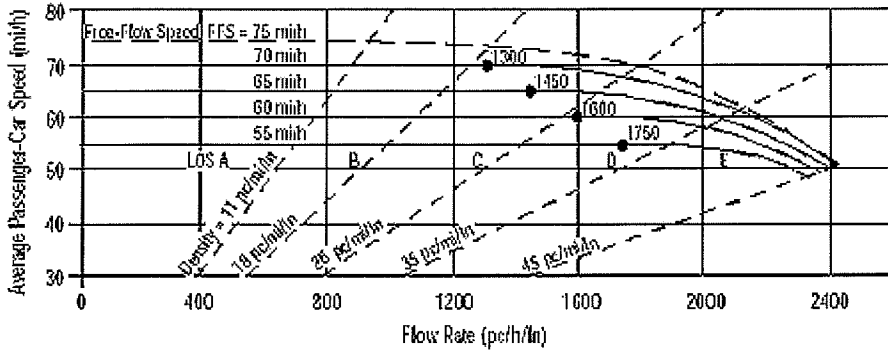

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 NB
Agency or Company	McMahon	From/To	South of Kendrick Street
Date Performed	11/15/07	Jurisdiction	
Analysis Time Period	AM	Analysis Year	2025 Build
Project Description Route 128 Add-A-Lane			

Oper.(LOS)
 Des.(N)
 Planning Data

Flow Inputs			
Volume, V	9300 veh/h	Peak-Hour Factor, PHF	0.90
AADT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AADT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AADT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	


Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 I/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	2609 pc/h/ln	Design LOS	
S	mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	pc/mi/ln	S	mi/h
LOS	F	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

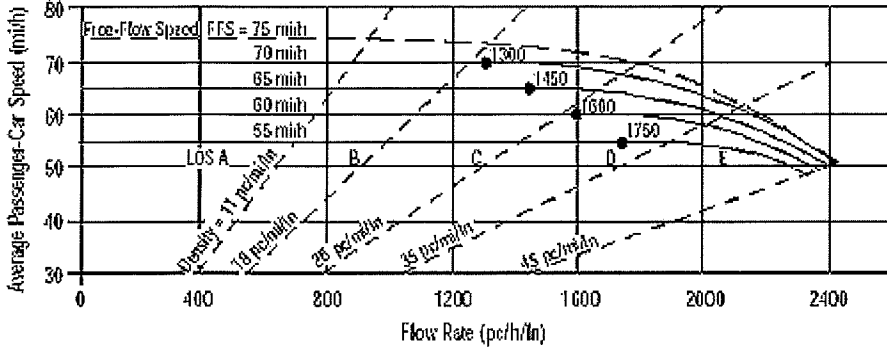

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 SB
Agency or Company	McMahon	From/To	South of Kendrick Street
Date Performed	11/15/07	Jurisdiction	
Analysis Time Period	AM	Analysis Year	2025 Build
Project Description Route 128 Add-A-Lane			

Oper.(LOS)
 Des.(N)
 Planning Data

Flow Inputs			
Volume, V	6600 veh/h	Peak-Hour Factor, PHF	0.90
AADT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AADT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AADT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	


Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 1/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	1852 pc/h/ln	Design LOS	
S	54.9 mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	33.7 pc/mi/ln	S	mi/h
LOS	D	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

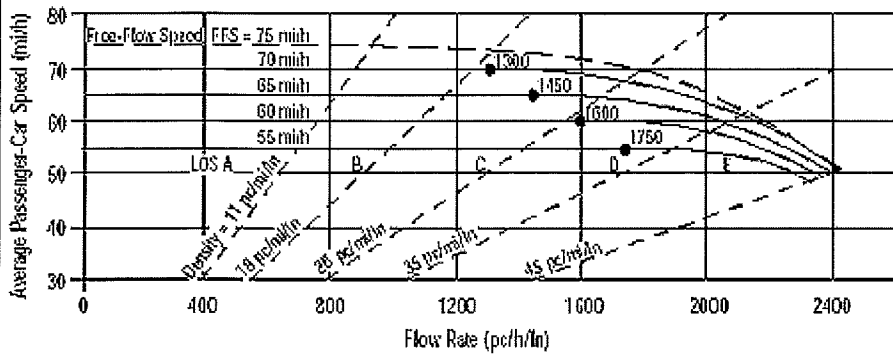

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 NB
Agency or Company	McMahon	From/To	Between C-D Ramps
Date Performed	11/27/07	Jurisdiction	
Analysis Time Period	PM	Analysis Year	2025 Build
Project Description Route 128 Add-A-Lane			

Oper.(LOS)
 Des.(N)
 Planning Data

Flow Inputs			
Volume, V	7550 veh/h	Peak-Hour Factor, PHF	0.90
AA DT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AADT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AADT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	


Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 I/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	2118 pc/h/ln	Design LOS	
S	52.7 mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	40.2 pc/mi/ln	S	mi/h
LOS	E	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

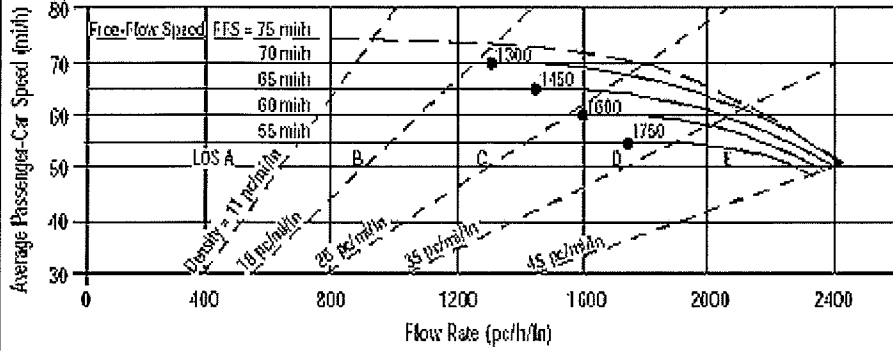

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information

Analyst: SSS
 Agency or Company: McMahan
 Date Performed: 11/27/07
 Analysis Time Period: PM

Site Information

Highway/Direction of Travel: Route 128/I-95 SB
 From/To: Between C-D Ramps
 Jurisdiction:
 Analysis Year: 2025 Build

Project Description: Route 128 Add-A-Lane

Oper.(LOS)

Des.(N)

Planning Data

Flow Inputs

Volume, V	7400 veh/h	Peak-Hour Factor, PHF	0.90
AADT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AADT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AADT x K x D	veh/h	Grade %	Length mi
Driver type adjustment	1.00	Up/Down %	

Calculate Flow Adjustments

f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs

Lane Width	12.0	ft
Rt-Shoulder Lat. Clearance	6.0	ft
Interchange Density	0.50	1/mi
Number of Lanes, N	4	
FFS (measured)	55.0	mi/h
Base free-flow Speed, BFFS		mi/h

Calc Speed Adj and FFS

f_{LW}	mi/h
f_{LC}	mi/h
f_{ID}	mi/h
f_N	mi/h
FFS	55.0 mi/h

LOS and Performance Measures

Operational (LOS)		
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	2076	pc/h/ln
S	53.4	mi/h
$D = v_p / S$	38.9	pc/mi/ln
LOS	E	

Design (N)

Design (N)	
Design LOS	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
S	mi/h
$D = v_p / S$	pc/mi/ln
Required Number of Lanes, N	


Glossary

N - Number of lanes	S - Speed
V - Hourly volume	D - Density
v_p - Flow rate	FFS - Free-flow speed
LOS - Level of service	BFFS - Base free-flow speed
DDHV - Directional design hour volume	

Factor Location

E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
f_p - Page 23-12	f_N - Exhibit 23-6
LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7

BASIC FREEWAY SEGMENTS WORKSHEET

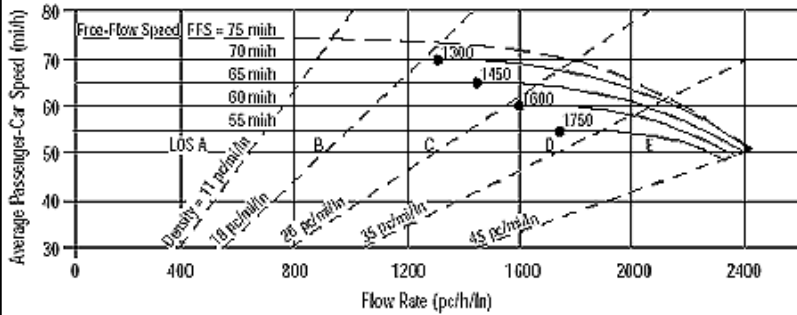

Application	Input	Output
Operational (LOS)	FFS, N, v _p	LOS, S, D
Design (N)	FFS, LOS, v _p	N, S, D
Design (v _p)	FFS, LOS, N	v _p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v _p)	FFS, LOS, N	v _p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 NB
Agency or Company	McMahon	From/To	Highland Ave to Rt 9
Date Performed	8/9/07	Jurisdiction	
Analysis Time Period	PM	Analysis Year	2025 Build

Project Description Route 128 Add-A-Lane

Oper.(LOS) Des.(N) Planning Data

Flow Inputs			
Volume, V	9250	veh/h	Peak-Hour Factor, PHF 0.90
AADT		veh/day	%Trucks and Buses, P _T 2
Peak-Hr Prop. of AADT, K			%RVs, P _R 0
Peak-Hr Direction Prop, D			General Terrain: Level
DDHV = AADT x K x D		veh/h	Grade % Length mi
Driver type adjustment	1.00		Up/Down %


Calculate Flow Adjustments			
f _p	1.00	E _R	1.2
E _T	1.5	f _{HV} = 1/[1+P _T (E _T - 1) + P _R (E _R - 1)]	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f _{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f _{LC}	mi/h
Interchange Density	0.50 l/mi	f _{ID}	mi/h
Number of Lanes, N	5	f _N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
<u>Operational (LOS)</u>		<u>Design (N)</u>	
v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	2076 pc/h/ln	Design LOS	
S	53.4 mi/h	v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	pc/h
D = v _p / S	38.9 pc/mi/ln	S	mi/h
LOS	E	D = v _p / S	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E _R - Exhibits 23-8, 23-10	f _{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E _T - Exhibits 23-8, 23-10, 23-11	f _{LC} - Exhibit 23-5
v _p - Flow rate	FFS - Free-flow speed	f _p - Page 23-12	f _N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v _p - Exhibits 23-2, 23-3	f _{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

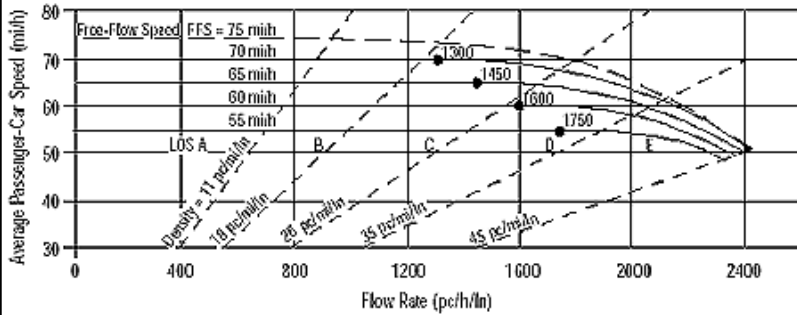

Application	Input	Output
Operational (LOS)	FFS, N, v _p	LOS, S, D
Design (N)	FFS, LOS, v _p	N, S, D
Design (v _p)	FFS, LOS, N	v _p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v _p)	FFS, LOS, N	v _p , S, D

General Information

Analyst: SSS
 Agency or Company: McMahon
 Date Performed: 11/19/07
 Analysis Time Period: PM

Site Information

Highway/Direction of Travel: Route 128/I-95 SB
 From/To: Highland Ave to Rt 9
 Jurisdiction:
 Analysis Year: 2025 Build

Project Description: Route 128 Add-A-Lane

Oper.(LOS) Des.(N) Planning Data

Flow Inputs

Volume, V	9100	veh/h	Peak-Hour Factor, PHF	0.90
AADT		veh/day	%Trucks and Buses, P _T	2
Peak-Hr Prop. of AADT, K			%RVs, P _R	0
Peak-Hr Direction Prop, D			General Terrain:	Level
DDHV = AADT x K x D		veh/h	Grade % Length	mi
Driver type adjustment	1.00		Up/Down %	

Calculate Flow Adjustments

f _p	1.00	E _R	1.2
E _T	1.5	f _{HV} = 1/[1+P _T (E _T - 1) + P _R (E _R - 1)]	0.990

Speed Inputs

Lane Width	12.0	ft
Rt-Shoulder Lat. Clearance	6.0	ft
Interchange Density	0.50	l/mi
Number of Lanes, N	5	
FFS (measured)	55.0	mi/h
Base free-flow Speed, BFFS		mi/h

Calc Speed Adj and FFS

f _{LW}		mi/h
f _{LC}		mi/h
f _{ID}		mi/h
f _N		mi/h
FFS	55.0	mi/h

LOS and Performance Measures

Operational (LOS)

v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	2042	pc/h/ln
S	53.8	mi/h
D = v _p / S	38.0	pc/mi/ln
LOS	E	

Design (N)

Design (N)

Design LOS	
v _p = (V or DDHV) / (PHF x N x f _{HV} x f _p)	pc/h
S	mi/h
D = v _p / S	pc/mi/ln
Required Number of Lanes, N	


Glossary

N - Number of lanes S - Speed
 V - Hourly volume D - Density
 v_p - Flow rate FFS - Free-flow speed
 LOS - Level of service BFFS - Base free-flow speed
 DDHV - Directional design hour volume

Factor Location

E_R - Exhibits 23-8, 23-10 f_{LW} - Exhibit 23-4
 E_T - Exhibits 23-8, 23-10, 23-11 f_{LC} - Exhibit 23-5
 f_p - Page 23-12 f_N - Exhibit 23-6
 LOS, S, FFS, v_p - Exhibits 23-2, 23-3 f_{ID} - Exhibit 23-7

BASIC FREEWAY SEGMENTS WORKSHEET

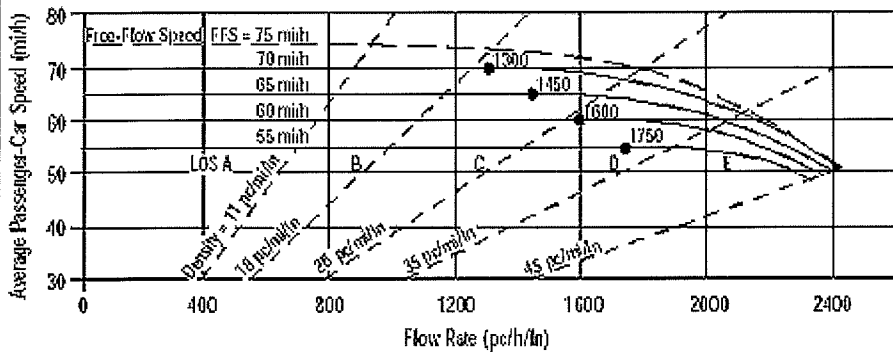

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 NB
Agency or Company	McMahon	From/To	South of Kendrick Street
Date Performed	11/15/07	Jurisdiction	
Analysis Time Period	PM	Analysis Year	2025 Build
Project Description Route 128 Add-A-Lane			

Oper.(LOS)
 Des.(N)
 Planning Data

Flow Inputs			
Volume, V	7600 veh/h	Peak-Hour Factor, PHF	0.90
AACT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AACT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AACT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	


Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 I/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	2132 pc/h/ln	Design LOS	
S	52.5 mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	40.6 pc/mi/ln	S	mi/h
LOS	E	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			

BASIC FREEWAY SEGMENTS WORKSHEET

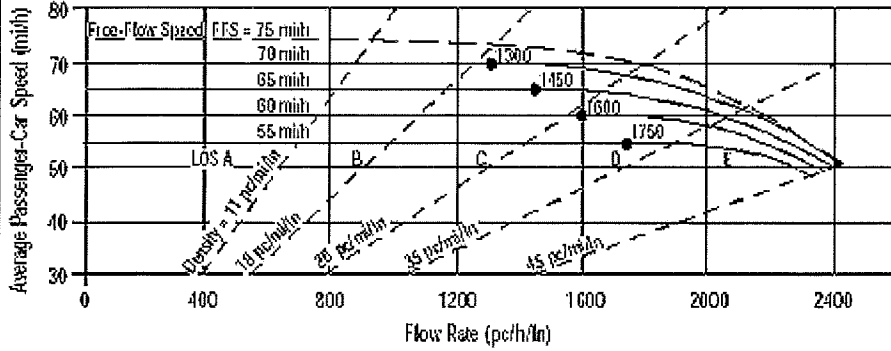

Application	Input	Output
Operational (LOS)	FFS, N, v_p	LOS, S, D
Design (N)	FFS, LOS, v_p	N, S, D
Design (v_p)	FFS, LOS, N	v_p , S, D
Planning (LOS)	FFS, N, AADT	LOS, S, D
Planning (N)	FFS, LOS, AADT	N, S, D
Planning (v_p)	FFS, LOS, N	v_p , S, D

General Information		Site Information	
Analyst	SSS	Highway/Direction of Travel	Route 128/I-95 SB
Agency or Company	McMahon	From/To	South of Kendrick Street
Date Performed	11/15/07	Jurisdiction	
Analysis Time Period	PM	Analysis Year	2025 Build
Project Description Route 128 Add-A-Lane			

Oper.(LOS)
 Des.(N)
 Planning Data

Flow Inputs			
Volume, V	9050 veh/h	Peak-Hour Factor, PHF	0.90
AADT	veh/day	%Trucks and Buses, P_T	2
Peak-Hr Prop. of AADT, K		%RVs, P_R	0
Peak-Hr Direction Prop, D		General Terrain:	Level
DDHV = AADT x K x D	veh/h	Grade % Length	mi
Driver type adjustment	1.00	Up/Down %	

Calculate Flow Adjustments			
f_p	1.00	E_R	1.2
E_T	1.5	$f_{HV} = 1/[1+P_T(E_T - 1) + P_R(E_R - 1)]$	0.990

Speed Inputs		Calc Speed Adj and FFS	
Lane Width	12.0 ft	f_{LW}	mi/h
Rt-Shoulder Lat. Clearance	6.0 ft	f_{LC}	mi/h
Interchange Density	0.50 1/mi	f_{ID}	mi/h
Number of Lanes, N	4	f_N	mi/h
FFS (measured)	55.0 mi/h	FFS	55.0 mi/h
Base free-flow Speed, BFFS	mi/h		

LOS and Performance Measures		Design (N)	
Operational (LOS)		Design (N)	
$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	2539 pc/h/ln	Design LOS	
S	mi/h	$v_p = (V \text{ or } DDHV) / (PHF \times N \times f_{HV} \times f_p)$	pc/h
$D = v_p / S$	pc/mi/ln	S	mi/h
LOS	F	$D = v_p / S$	pc/mi/ln
		Required Number of Lanes, N	

Glossary		Factor Location	
N - Number of lanes	S - Speed	E_R - Exhibits 23-8, 23-10	f_{LW} - Exhibit 23-4
V - Hourly volume	D - Density	E_T - Exhibits 23-8, 23-10, 23-11	f_{LC} - Exhibit 23-5
v_p - Flow rate	FFS - Free-flow speed	f_p - Page 23-12	f_N - Exhibit 23-6
LOS - Level of service	BFFS - Base free-flow speed	LOS, S, FFS, v_p - Exhibits 23-2, 23-3	f_{ID} - Exhibit 23-7
DDHV - Directional design hour volume			